



FEATURES

- 110W isolated DC/DC converter with 11.7 CFM forced air-cooling, 70W convection cooled
- Fully isolated primary and secondary
- Wide input range 9-32VDC
- Compact size 2 x 5 inch
- Low inrush current to prevent power adapter turn on issue
- Input polarity reversed protection
- Built in DC input on/off switch controller
- High efficiency up to 88%



1. Description

The MPD-F113-1 is a 110W single output DC/DC converter. It is a compact size 2 x 5" and wide input range from 9-32VDC. Fully isolated primary to secondary avoid disturbed noise to affect secondary side. The low inrush current is 3A max. for preventing turn on issue and protecting the power supply. The built in DC input on/off switch controller can use with a normal on/off switch, instead of high rated current switch, and TTL signal control is available as well (see 8. application note). In addition, design in polarity reverse protection to avoid wrong input polarity.

Output Voltage	Min. Output Current	Rated Output Current	Max. output Current ^(Note 1)	Line Regulation	Load Regulation	Ripple & Noise p-p ^(Note 2)	Initial Setting Accuracy ^(Note 3)
+12V	0A	5.8A	9.2A	±1%	±1%	120mV	11.88V to 12.12V

Total Output Power: 110W at 50°C environment temperature^(Note 4).

Note: 1) when output current above 5.8A, it has to force air cooling 11.7 CFM.

2) Measured by a 20MHz bandwidth limited oscilloscope and the each output is connected with a 10μF Electrolytic capacitor and a 0.1μF Ceramic Capacitor.

3) At factory, all outputs in 60% rated load. The +12V output is set to between 11.88V and 12.12V.

4) The total DC continuous power shall be kept with 70W at input from 18V to 32VDC; 65W at input from 12V-17.9VDC; 60W at input from 9-11.9VDC convection cooled and 110W at input from 12 to 32VDC; 95W at input from 9 to 11.9VDC with force air cooling 11.7 CFM.

2. Input Specification

Parameter	Conditions/Description	Min.	Nom.	Max.	Units
Input Voltage	Continuous input range.	9	12/24	32	VDC
Input Current	DC Input Voltage 10VDC, rated load.			13	A
Inrush Current	Nominal DC Input Voltage (12/24VDC), cold start at 25°C.			3	A

3. Output Specification

Parameter	Conditions/Description	Min.	Nom.	Max.	Units
Efficiency	At input voltage 12/24, rated load condition.		87	88	%
Minimum load			See Chart of Description		
Ripple & Noise	Rated load, 20MHz bandwidth		See Chart of Description		
Output Power	Continuous output power.		See Chart of Description		
Line Regulation	Less than ±1% at rated load with ±10% changing in input voltage +12V and +24V.		See Chart of Description		
Load Regulation	Measured from 60% to 100% rated load and from 60% to 20% rated load (60% ±40% rated load) for each output, and others voltage setting at 60%.		See Chart of Description		



4. Interface Signals and Internal Protection

Parameter	Conditions/Description
Short Circuit or Over Load Protection	The power supply will go into hiccup mode against short circuit or over load conditions, and will auto-recovery while fault conditions moved.
Input On/Off switch	(1) Use a switch to short pin1 and pin2 of SW1 to turn on the power supply. (2) Or, it can use TTL signal to control the power on/off (please see more detail at Application Note).
Over Voltage Protection	For some reason the power supply fails to control itself, the build-in over voltage protection circuit will shut down the outputs to prevent damaging external circuits. The trigger point is from 12.8V to 15V.

5. Safety Approvals, EMI and EMS Specification

Parameter	Conditions/Description	Min.	Nom.	Max.	Units
Approvals	UL, UL 60950-1				Design to meet
	CSA, CSA 22.2 No. 234				
	CB, IEC 60950-1				
	TUV, EN 60950-1: 2001				
Radiation ^(Note)	EN 55022 / CISPR 22 & FCC Part 15	A			Class
Conduction	EN 55022 / CISPR 22 & FCC Part 15	A			
EMS	IEC 61000-4-2: 2001, 8KV air discharge, 6KV contact discharge	A			Criteria
	IEC 61000-4-3: 2002, 10V/m	A			
	IEC 61000-4-4: 2004, 2KV line & PE	A			
	IEC 61000-4-5: 2001, 0.5KV line to line	A			

Note: 1) As a build-in type power supply, the power supply needs to be installed in a suitable enclosure to pass the EMI/EMC tests. The final assembly has to comply with the valid EMI/EMC and safety.

2) With Class B radiation and conduction is required an additional input module filter.

6. Environment Specification


Parameter	Conditions/Description	Min.	Nom.	Max.	Units
Operating Temperature	Derate linearly above 50°C by 1.5% per °C At 100% load: to a maximum temperature of 70°C At 70% load:	-10		+50 +70	°C
Storage Temperature		-20		+75	°C
Relative Humidity	Non-condensing.	10		90	%RH
Altitude	Operating			2K	meter

7. Mechanical Specification

Parameter	Conditions/Description
Dimension	50.8 (L) x 127 (W) x 31.5 (H) mm, Tolerance +/- 0.4mm.
Connector	CN1 --- DC input: Dinkle ED500V-02 Terminal blocks. CN2 --- DC output: Molex 5273-04A or equivalent. FAN --- Output: Molex 5045-02A or equivalent. SW1 --- Remote on/off Molex 5045-02A or equivalent.
Pin Assignment	CN1 Pin 1. + 2. - CN2 Pin 1. +12V 3. GND 2. +12V 4. GND FAN Pin 1. +12V 2. GND SWITCH Pin 1. + 2. -

Dimension

50.8 (L) x 127 (W) x 31.5 (H) mm, Tolerance +/- 0.5mm.

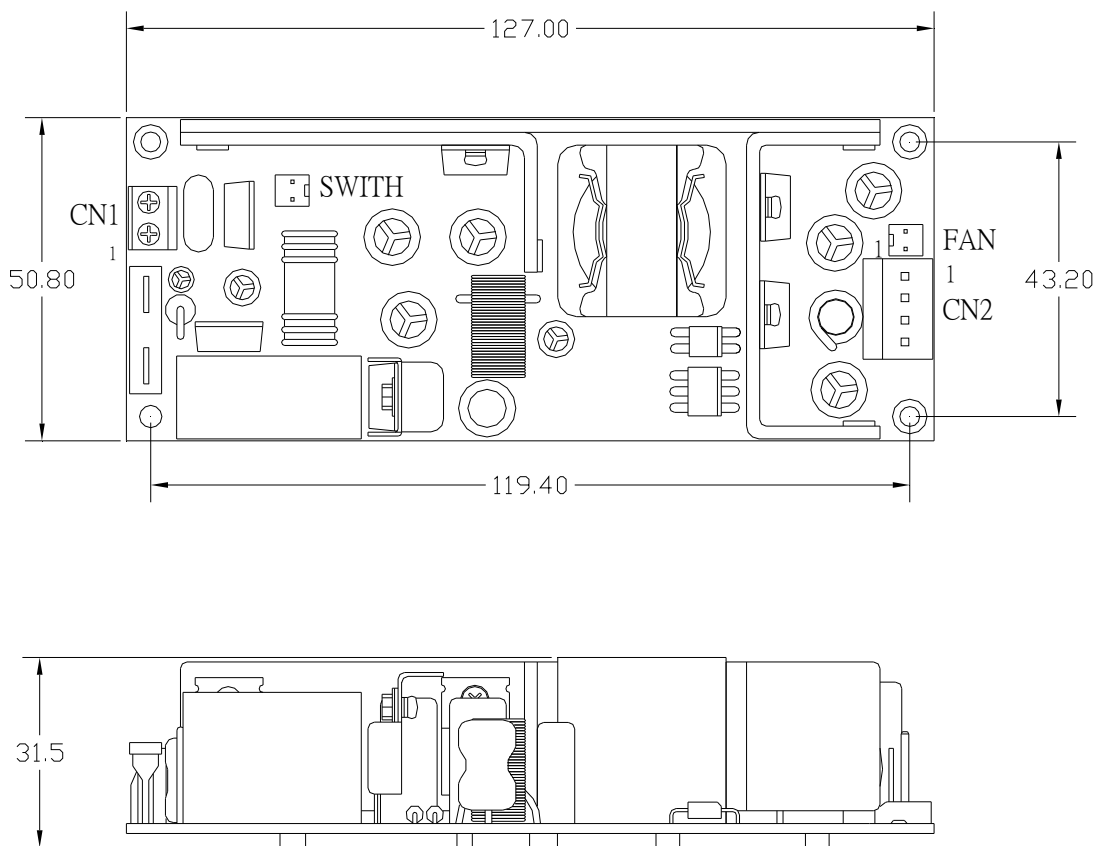

8. Application Note

Please refer circuit below when use TTL to control the PSU turning on/off.

