




SPECIFICATION

For

SWITCHING POWER SUPPLY

M/N: MPI-810H

Order No. MPI-810H-A1





1.0 INTRODUCTIONS

MPI-810H is a 120Watts forced air-cooling, five outputs switching power supply; and it's designed for General Purpose.

2.0 INPUT SPECIFICATIONS

2.1 Universal AC Input Voltage

The range of input voltage is from 90VAC to 260VAC.

2.2 Input frequency

The range of input frequency is between 47Hz to 63Hz.

2.3 Input current

The maximum input current is 3A at 115VAC or 1.5A at 230VAC.

2.4 Inrush current

The inrush current is less than 30A at 115VAC input or 60A at 230VAC input, cold start at 25°C.

3.0 OUTPUT SPECIFICATIONS

3.1 Load range

| Output voltage | Min. load | Rated load | Max. load | Voltage accuracy |
|----------------|-----------|------------|-----------|-------------------|
| +5V | 1A | 8A | 14A | 5.05V to 5.15V |
| +12V | 0A | 2.5A | 6A | 11.25V to 12.75V |
| -12V | 0A | 0.5A | 1A | -11.25V to -13.0V |
| +3.3V | 0A | 8A | 12A | 3.10V to 3.50V |
| +5Vsb | 0A | 0.75A | | 4.80V to 5.20V |

At the factory, the +5V output is set between 5.08V to 5.13V and all output at 60% rated load and the other outputs are checked to be within the accuracy range. The maximum total combined output power on the 3.3V and 5V rails is 70W, and the max. load cannot be exceed 120W.

3.2 Ripple and noise

The peak to peak ripple and noise for +5V, +3.3V outputs are less than 50mV for +5Vsb is 120mV, for +12 V is less than 120mV, for -12V is less than 200mV at ranted load and nominal input, which is measured by a 15MHz bandwidth limited oscilloscope and the each output is connected with 0.47μF capacitor.

3.2 Line regulation

The line regulation is less than +/-1% at rated load with +/-10% change in input voltage.

3.3 Load regulation

The load regulation for +5V is less than +/-2 %, for +12V is less than +7%~-3%, for -12V is +8%~-3%, + 3.3V is less than +/-5% while the measuring is done by changing the measured output loading +/-40% from 60% rated load, and keep other output is at 60% rated load.



4.0 GENERAL FEATURES

4.1 Efficiency

The efficiency is higher than 70% while measuring at nominal line and rated load.

4.2 Hold up time

The hold up time is longer than 16mS at 115VAC input and rated load.

4.3 Protection

The power supply will generate the hiccup mode to protect itself against short circuit or over load condition, and will return to normal after wrong condition is removed.

4.4 Power On/Off

The power supply will be turned on when the power On/Off pin is connected to secondary GND.

5.0 ENVIRONMENT SPECIFICATIONS

5.1 Operating temperature

0°C to 50°C

(Output power 120W with min. 38CFM forced air, 100W with min. 8 CFM, and 85W without external airflow)

5.2 Storage temperature

-40°C to +70°C

5.3 Altitude

Will operate properly at any altitude between 0 to 10000ft.

5.4 Humidity

10% to 90% Non-Condensing.

6.0 INTERNATIONAL STANDARDS

6.1 Safety standards

Designed to meet the following standards

UL 1950

CSA 22.2 No.234

VDE EN 60950

6.2 EMI standards

Designed to meet the following limits:

FCC docket 20780 curve” B”

EN 55022”B”

6.3 CE standards

Designed to meet the following standards:


IEC-801-2 Level 3 8KV air discharge

IEC-801-3 Level 3 3V/M

IEC-801-4 Level 3 2KV



7.0 MECHANICAL SPECIFICATION

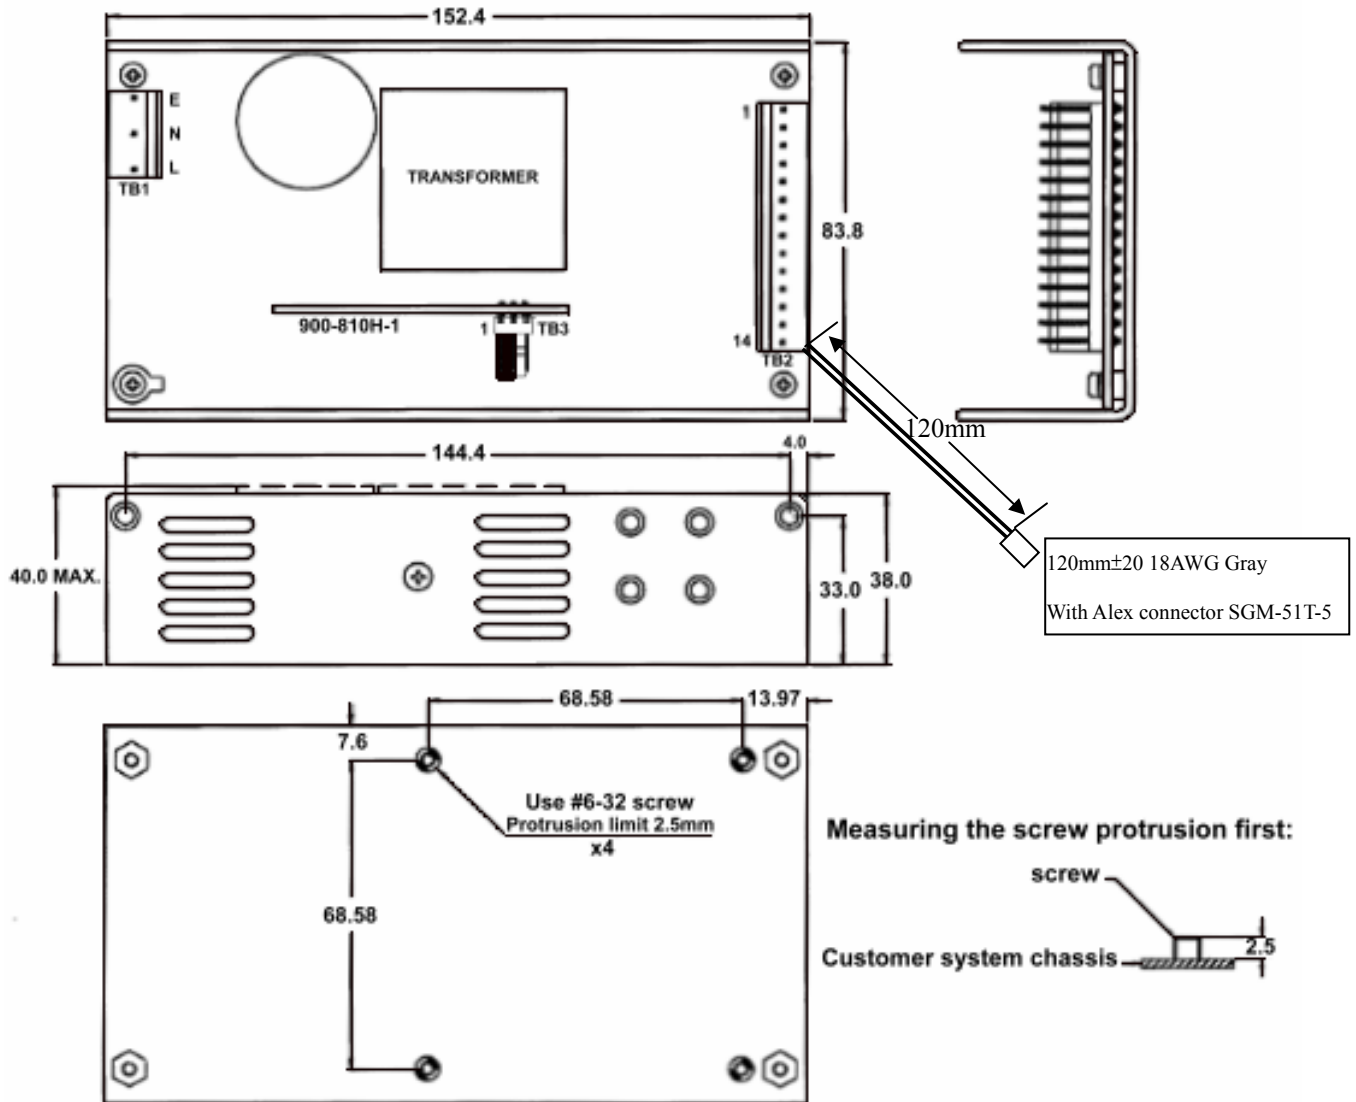

7.1 Dimensions

Dimensions are shown in mm as above. Tolerance specified is +/-0.4mm.

7.2 Connectors

- TB1 --- AC input : Molex 5273-05A withdraw 2 pins or equivalent .
- TB2 --- DC output : Molex 5273-14A or equivalent.
- TB3 --- DC output : Molex 5045-03A

7.3 DC output pin assignment

| | | | | | | | |
|-----|-----|----|-----------|-----|------|-----|------|
| TB2 | Pin | 1. | +5V | 6. | GND | 11. | 3.3V |
| | | 2. | +5V | 7. | GND | 12. | 3.3V |
| | | 3. | +5V | 8. | GND | 13. | 3.3V |
| | | 4. | GND | 9. | +12V | 14. | -12V |
| | | 5. | GND | 10. | +12V | | |
| TB3 | Pin | 1. | PS On/OFF | 2. | GND | 3. | 5Vsb |